






This rack demonstrates the four available compartment configurations. Four permanent lanes can be divided into 7, 6, 3, or 2 compartments each (as shown from left to right).

Rack Features

- Made of GE Noryl PPX 615 which is suitable for all retort process modes
- Sized to optimize capacity in 1400 mm diameter retorts
- Standard compartments are available in three depths (specialized depths available upon request)
- Available in four standard configurations
- Avoid high tooling costs
- Less expensive and lighter than comparable metal racks

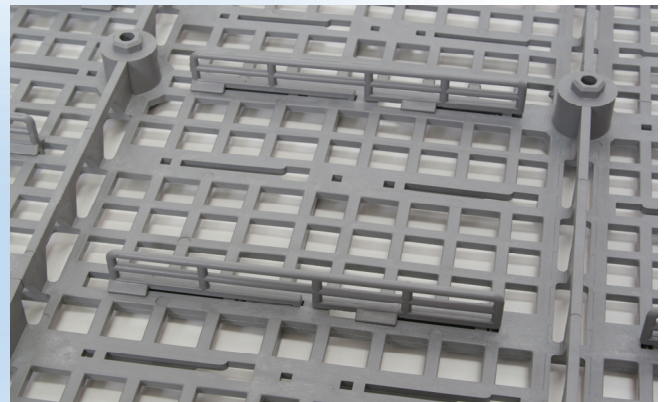

Compartments are created using dividers which permanently snap into the bed of the rack.

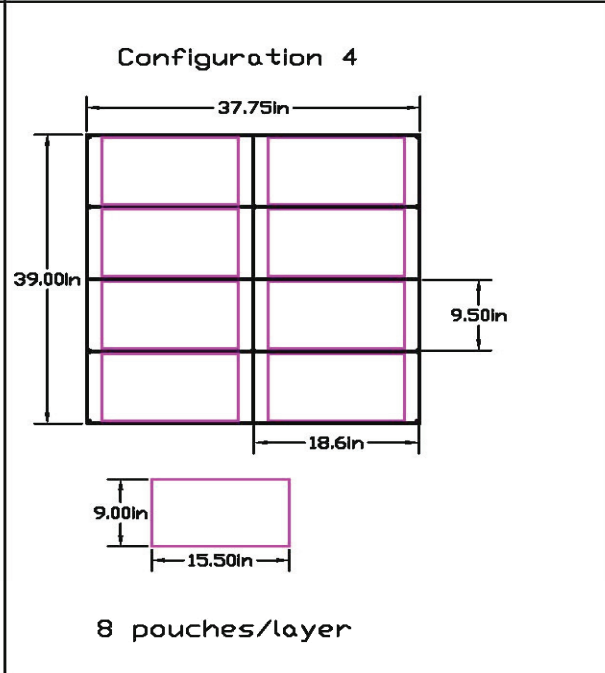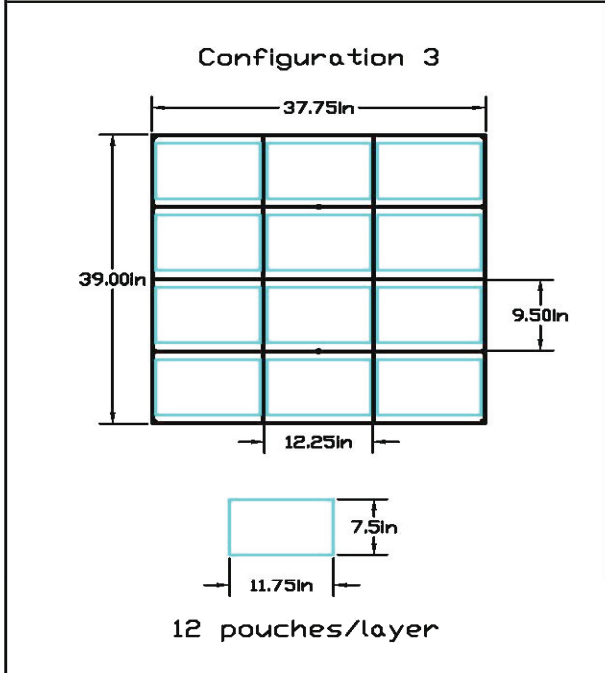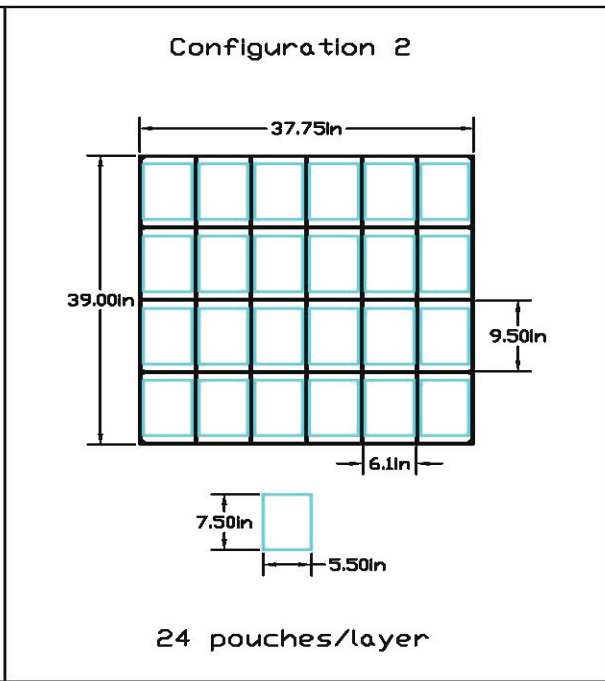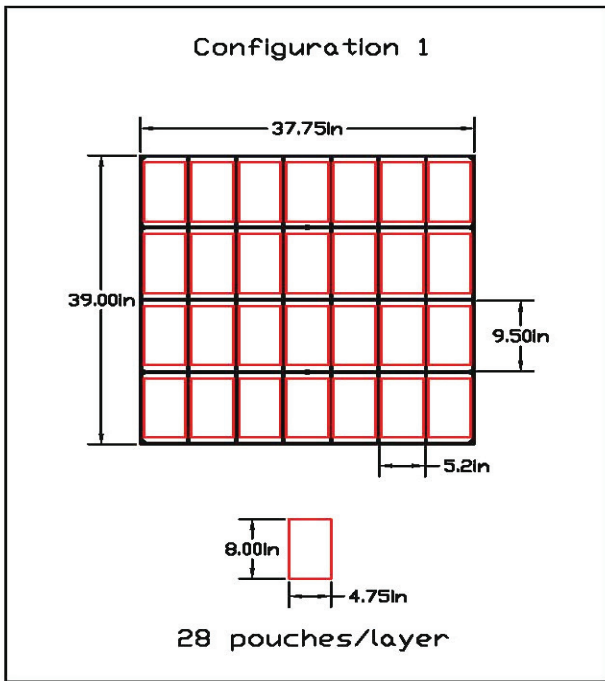

Three Standard Compartment Depths

1" Compartment Depth :	23 Racks/Stack*
1-1/4" Compartment Depth :	20 Racks/Stack*
2-1/4" Compartment Depth :	13 Racks/Stack*

* Based on SSA Model 1400 Retorts